

Work Positioners

Specifications, WP 70 SS

Model	WP 70 SS
Art. no.	87687
Capacity	70 kg
Max. platform height	1384 mm
Closed height	139 mm
Length	747 mm
Width	560 mm
Height	1512 mm
Loading area width	495 mm
Loading area length	495 mm
Lifting time mm/sec	125 mm/sec
Battery	24V/7,2Ah
Charger	1,8A/24V
Weight pack. incl.	30 kg



Accessories, WP 70 SS


Plastic platform

Platform in PEHD, the platform is available in different sizes up to 600x600 mm. Standard platform for WP 70 SS and WP 90 SS.



Stainless steel platform

The platform is available in different sizes up to 600x600 mm. Standard platform for WP 200, WP 200 SS and WP 300 SS.

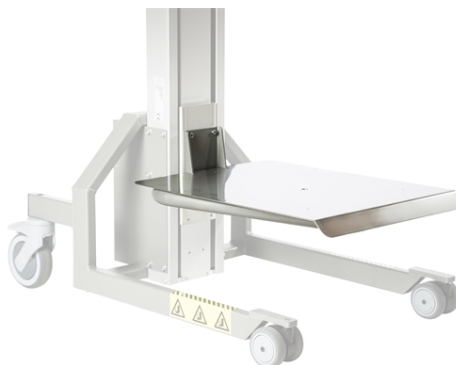

Stainless steel platform + V-cradle

Rotatable V-cradle in PEHD, LxWxH 340x290x80 mm. Stainless steel platform, LxW 500x400 mm. Max width of reel 600 mm.



Reel mandrel

Available in two different lengths, 500 and 800 mm.



Twin mandrel

Available in different lengths and widths.



Reel mandrel with front roller and V-cradle

The V-cradle is rotatable and can easily be removed. When the V-cradle is attached the tool can handle reels up to 600 mm.



Lifting fork

Commonly used for lifting boxes, available in different sizes.



Work Positioners

Work Positioners operates with loads of up to 300 kg. Weight distribution is spread evenly over all four wheels and with the unit's short wheelbase and light self-weight the Work Positioner is the safest and most maneuverable lifter on the market!

An improvement in the working environment resulting in greater profitability for your company.

Charger

The charger cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.

Perfect weight distribution

Due to the lifting mast positioning at the rear of the chassis EdmoLift have achieved near perfect weight distribution providing unrivalled maneuverability. The 100% vertical mast eliminates problems such as platform drift found on other products.

Compact design

The WP features an extremely compact design which is also very easy to clean.

Leg frames

All models can be equipped with a variety of different leg frames, wider legs, narrow legs. Some models even have adjustable legs.

Product features

- One- or two-speed function for elevation and descent (depending on model).
- Battery charger with auto-cut-of-function.
- Easily customised for your specific requirements - higher lift heights, wider leg frames etc.
- Wide range of tools and options such as platforms, reel handlers, v-cradles, control units and leg frames.
- IP66 models.
- Fastest lifting speed on the market – 125 and 270 mm/second.
- Load centre 400 mm.